

A GRID-BASED  
BITMAP  
TYPEFACE

AaBb

1234

5678

# 16 Regular



256

fNA@

128

fNA@bN9d

64

fNA@bN9dy2J4hyqx E

48

fNA@bN9dy2J4hyqx E7iGKneO

32

fNA@bN9dy2J4hyqx E7iGKneOU6g2Oshdu

16

fNA@bN9dy2J4hyqx E7iGKneOU6g2OshduOwxYQ609CNUH2SLKtsUdmct1Juv8y

8

fNA@bN9dy2J4hyqx E7iGKneOU6g2OshduOwxYQ609CNUH2SLKtsUdmct1Juv8y

256/256



128/128

Algorithm  
HTTPS://

64/64

Nintendo SNES  
Playstation  
DEBUG\_ROM v3.0  
16:39 UTC

36/42

A bit, short for binary digit, is the fundamental building block of data in computing. Each bit holds a value of either 0 or 1, representing

24/36

A bit, short for binary digit, is the fundamental building block of data in computing. Each bit holds a value of either 0 or 1, representing the most basic form of information. This binary system is foundational because it aligns perfectly with the two-state nature

18/24

A bit, short for binary digit, is the fundamental building block of data in computing. Each bit holds a value of either 0 or 1, representing the most basic form of information. This binary system is foundational because it aligns perfectly with the two-state nature of electronic circuits used in computer hardware, where 0 can represent the absence of an electrical signal, and 1 can represent its presence. Despite their simplicity, bits are capable of representing complex information when

14/18

A bit, short for binary digit, is the fundamental building block of data in computing. Each bit holds a value of either 0 or 1, representing the most basic form of information. This binary system is foundational because it aligns perfectly with the two-state nature of electronic circuits used in computer hardware, where 0 can represent the absence of an electrical signal, and 1 can represent its presence. Despite their simplicity, bits are

capable of representing complex information when grouped together in larger units. Computers typically process and store data in larger units called bytes, where one byte consists of eight bits. This grouping allows for a more efficient and manageable system of data storage and processing. For example, a single byte can represent 256 different values ( $2^8$ ), making it possible to encode a wide range of information, such as characters

12/15

A bit, short for binary digit, is the fundamental building block of data in computing. Each bit holds a value of either 0 or 1, representing the most basic form of information. This binary system is foundational because it aligns perfectly with the two-state nature of electronic circuits used in computer hardware, where 0 can represent the absence of an electrical signal, and 1 can represent its presence. Despite their simplicity, bits are capable of representing complex information when grouped together in larger units. Computers typically process and store data in larger units called bytes, where one byte consists of eight

bits. This grouping allows for a more efficient and manageable system of data storage and processing. For example, a single byte can represent 256 different values ( $2^8$ ), making it possible to encode a wide range of information, such as characters in a text file or colors in an image. By using bytes as the standard unit of data, computer systems can handle a more extensive and versatile array of tasks. Beyond bytes, data can be organized into even larger units such as kilobytes (KB), megabytes (MB), gigabytes (GB), and so on, each representing a higher magnitude of data storage. These hierarchical structures are

9/12

A bit, short for binary digit, is the fundamental building block of data in computing. Each bit holds a value of either 0 or 1, representing the most basic form of information. This binary system is foundational because it aligns perfectly with the two-state nature of electronic circuits used in computer hardware, where 0 can represent the absence of an electrical signal, and 1 can represent its presence. Despite their simplicity, bits are capable of representing complex information when grouped together in larger units. Computers typically process and store data in larger units called bytes, where one byte consists of eight bits. This grouping allows for a more efficient and manageable system of data storage and processing. For example, a single byte can represent 256 different values ( $2^8$ ), making it possible to encode a wide range of information, such as characters in a text file or colors in an image. By using bytes as the standard unit of data, computer systems can handle a more extensive and versatile array of tasks. Beyond bytes,

data can be organized into even larger units such as kilobytes (KB), megabytes (MB), gigabytes (GB), and so on, each representing a higher magnitude of data storage. These hierarchical structures are essential for managing the vast amounts of data that modern computers handle daily. For instance, a typical high-definition movie might require several gigabytes of storage, illustrating the exponential growth in data needs and the importance of efficient data management systems. The ability to scale from bits to bytes and beyond is a testament to the flexibility and power of binary-based computing. In addition to storage, the manipulation and processing of data in binary form enable computers to perform a myriad of operations, from simple arithmetic calculations to complex algorithms. Each instruction executed by a computer's central processing unit (CPU) is ultimately reduced to a series of binary operations, highlighting the profound role that bits play in the functionality of all digital systems. This binary foundation allows

## UPPERCASE

A Á Â Ã Ä Å Æ Ç È É Ê Ë Ì Í Î Ï Ñ Ò Ó Ô Õ Ö × Ø Ù Ú Û Ü Ý Þ ß à á â ã ä å æ ç è é ê ë ì í î ï ñ ò ó ô õ ö ÷ ø ù ú û ü ý þ ß À Á Â Ã Ä Å Æ Ç È É Ê Ë Ì Í Î Ï Ñ Ò Ó Ô Õ Ö × Ø Ù Ú Û Ü Ý Þ ß à á â ã ä å æ ç è é ê ë ì í î ï ñ ò ó ô õ ö ÷ ø ù ú û ü ý þ ß

LOWERCASE

a á â ã ä å æ ç c ĉ d đ ď ē é ê ë ě  
è è ě ě ě ě ě ě ě f g ĝ ğ ħ ĥ i j ĩ ĵ Ĺ ĺ Ļ Ľ  
ŋ ŋ ħ o ó ô õ ö ø ő ő ő ő ő ő ő ő ő ő ő ő  
ſ s ß t ‡ † ‡ ‡ u ú û ü ù v w x y ý ŷ ŷ  
z z ž ž

## NUMERALS

0 1 2 3 4 5 6 7 8 9 / 1/2 1/4 3/4 a o 1 2 3 4

## CURRENCY

Ñ Ò Ó Ô Õ Ö × Š š € £ ¤ ¥ ¦ § ¨ © ª « ¬ ® ¯ ° ± ² ³ ´ µ ¶ · ¸ ¹ º » ¼ ½ ¾

## PUNCTUATION & SYMBOLS


[illegible]

## ARROWS

↑ ↗ → ↘ ↓ ↙ ← ↖ ↔ ↕ ▲ ► ▼ ◀



8 Regular

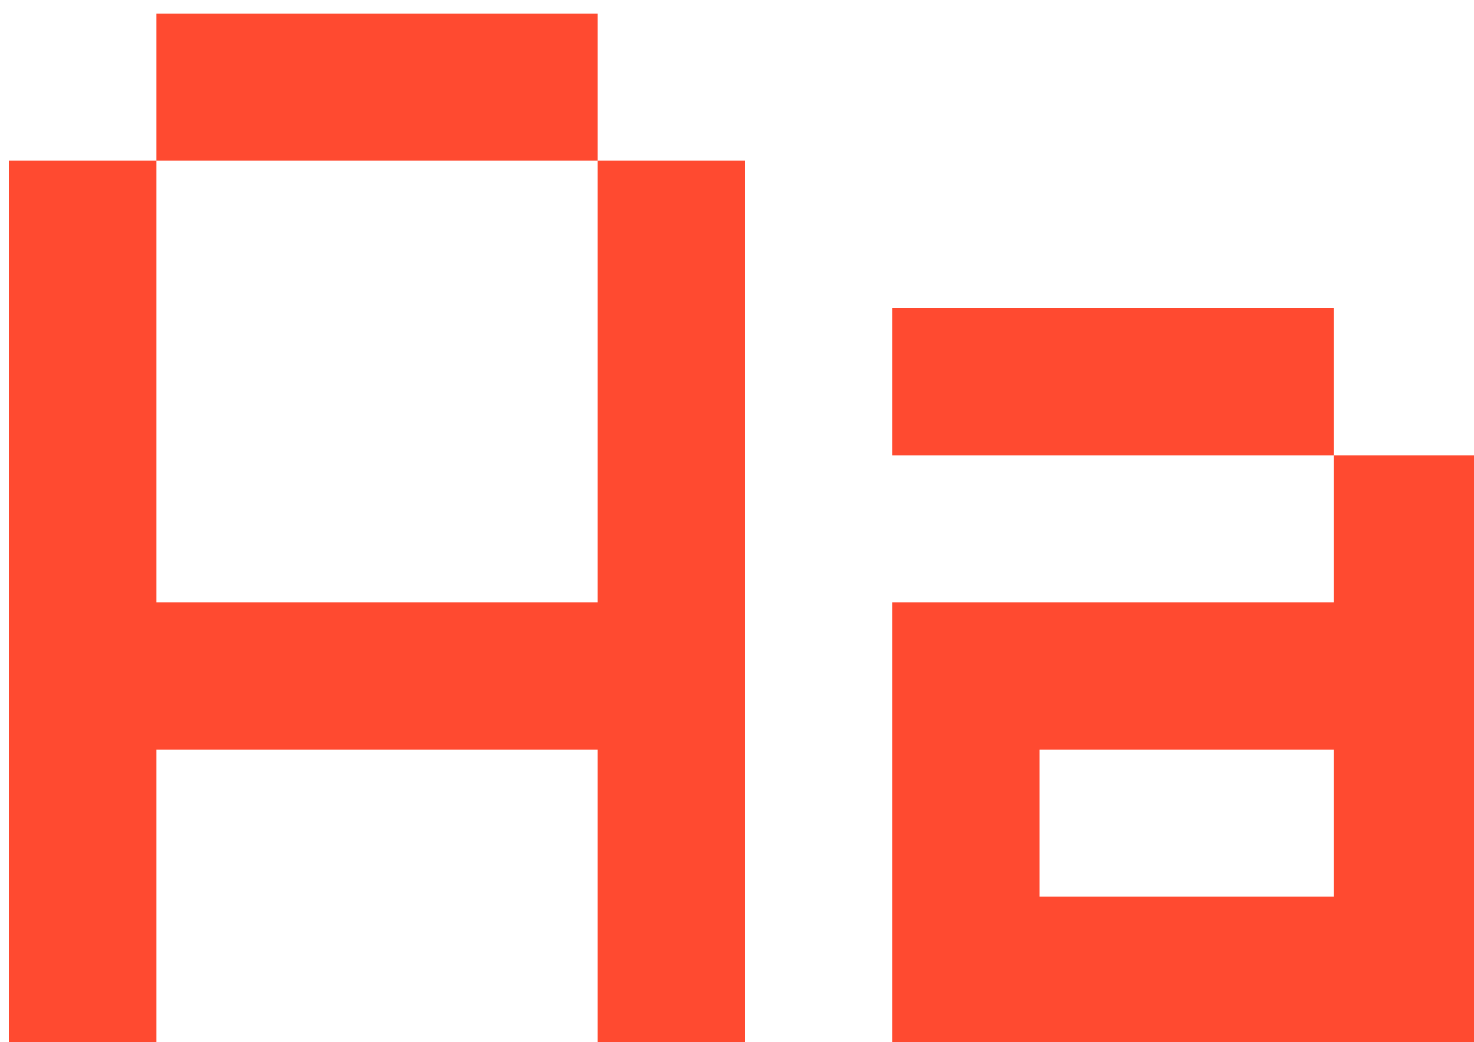

256

f n A @ b N 9 d y 2 J 4 h y q x E

128

f n A @ b N 9 d y 2 J 4 h y q x E

64

f n A @ b N 9 d y 2 J 4 h y q x E

48

f n A @ b N 9 d y 2 J 4 h y q x E 7 i G K n e O

32

f n A @ b N 9 d y 2 J 4 h y q x E 7 i G K n e O U 6 g 2 0 s h d u

16

f n A @ b N 9 d y 2 J 4 h y q x E 7 i G K n e O U 6 g 2 0 s h d u O w x Y Q 6 @ 9 C N U H 2 S L K t s U d m c t I J v v 8 y

8

f n A @ b N 9 d y 2 J 4 h y q x E 7 i G K n e O U 6 g 2 0 s h d u O w x Y Q 6 @ 9 C N U H 2 S L K t s U d m c t I J v v 8 y

256/256



128/128

Algorithm  
HTTPS://

64/64

Nintendo SNES  
Playstation  
DEBUG\_ROM v3.0  
16:39 UTC

36/42

A bit, short for binary digit, is the fundamental building block of data in computing. Each bit holds a value of either 0 or 1, representing

24/36

A bit, short for binary digit, is the fundamental building block of data in computing. Each bit holds a value of either 0 or 1, representing the most basic form of information. This binary system is foundational because it aligns perfectly with the two-state nature

18/24

A bit, short for binary digit, is the fundamental building block of data in computing. Each bit holds a value of either 0 or 1, representing the most basic form of information. This binary system is foundational because it aligns perfectly with the two-state nature of electronic circuits used in computer hardware, where 0 can represent the absence of an electrical signal, and 1 can represent its presence. Despite their simplicity, bits are capable of representing complex information when

14/18

A bit, short for binary digit, is the fundamental building block of data in computing. Each bit holds a value of either 0 or 1, representing the most basic form of information. This binary system is foundational because it aligns perfectly with the two-state nature of electronic circuits used in computer hardware, where 0 can represent the absence of an electrical signal, and 1 can represent its

presence. Despite their simplicity, bits are capable of representing complex information when grouped together in larger units. Computers typically process and store data in larger units called bytes, where one byte consists of eight bits. This grouping allows for a more efficient and manageable system of data storage and processing. For example, a single byte can represent 256 different values ( $2^8$ ),

---

12/15

A bit, short for binary digit, is the fundamental building block of data in computing. Each bit holds a value of either 0 or 1, representing the most basic form of information. This binary system is foundational because it aligns perfectly with the two-state nature of electronic circuits used in computer hardware, where 0 can represent the absence of an electrical signal, and 1 can represent its presence. Despite their simplicity, bits are capable of representing complex information when grouped together in larger units. Computers typically process and store data in larger units called bytes,

where one byte consists of eight bits. This grouping allows for a more efficient and manageable system of data storage and processing. For example, a single byte can represent 256 different values ( $2^8$ ), making it possible to encode a wide range of information, such as characters in a text file or colors in an image. By using bytes as the standard unit of data, computer systems can handle a more extensive and versatile array of tasks. Beyond bytes, data can be organized into even larger units such as kilobytes (KB), megabytes (MB), gigabytes (GB), and so on, each representing a higher magnitude

---

9/12

A bit, short for binary digit, is the fundamental building block of data in computing. Each bit holds a value of either 0 or 1, representing the most basic form of information. This binary system is foundational because it aligns perfectly with the two-state nature of electronic circuits used in computer hardware, where 0 can represent the absence of an electrical signal, and 1 can represent its presence. Despite their simplicity, bits are capable of representing complex information when grouped together in larger units. Computers typically process and store data in larger units called bytes, where one byte consists of eight bits. This grouping allows for a more efficient and manageable system of data storage and processing. For example, a single byte can represent 256 different values ( $2^8$ ), making it possible to encode a wide range of information, such as characters in a text file or colors in an image. By using bytes as the standard unit of data, computer systems can handle a more extensive and versatile array of tasks. Beyond bytes,

data can be organized into even larger units such as kilobytes (KB), megabytes (MB), gigabytes (GB), and so on, each representing a higher magnitude of data storage. These hierarchical structures are essential for managing the vast amounts of data that modern computers handle daily. For instance, a typical high-definition movie might require several gigabytes of storage, illustrating the exponential growth in data needs and the importance of efficient data management systems. The ability to scale from bits to bytes and beyond is a testament to the flexibility and power of binary-based computing. In addition to storage, the manipulation and processing of data in binary form enable computers to perform a myriad of operations, from simple arithmetic calculations to complex algorithms. Each instruction executed by a computer's central processing unit (CPU) is ultimately reduced to a series of binary operations, highlighting the profound role that bits play in the functionality of all digital systems. This binary foundation allows for the development

---

## UPPERCASE

A Á Â Ã Ä Å Æ Ç È É Ê Ë Ì Í Î Ï Ð Ñ Ò Ó Ô Õ Ö × Ø Ù Ú Û Ü Ý Þ ß à á â ã ä å æ ç è é ê ë ì í î ï ð ñ ò ó ô õ ö ÷ ø ù ú û ü ý þ ÿ

LOWERCASE

a á â ã ä å æ ç è é ê ë ì í î ï ð ñ ò ó ô õ ö ø ù ú û ü ý þ ÿ à á â ã ä å æ ç è é ê ë ì í î ï ð ñ ò ó ô õ ö ø ù ú û ü ý þ ÿ

Ā ā Ă ă Ą ą Å å Ć ć Č č Ĉ ĉ Ċ ċ Ď ě Đ đ Ģ ģ Ĥ ĥ Ħ ħ İ i Ĵ ĵ Ķ ķ Ļ ļ Ľ ľ Ņ ņ Ŋ ŋ Ō ō Œ œ P p Q q R r Š š Ś ś S s T t U u V v W w X x Y y Z z Ž ž

## NUMERALS

0123456789 /  $\frac{1}{2}$   $\frac{3}{4}$   $\frac{5}{8}$  a 01234

## CURRENCY

N O B C c D x S d E F G K L M N P P P Q R U V

## PUNCTUATION & SYMBOLS

.,;|...!|&?&#x2013;\*#//\11§©®™°¹ª«¬®¯°±²³´µ¶·¸¹º»¼½¾¿ÀÁÂÃÄÅÆÇÈÉÊËÌÍÎÏÐÑÒÓÔÕÖ×ØÙÚÛÜÝÞßàáâãäåæçèéêëìíîïðññòóôõö÷øùúûüýþÿ

## ARROWS

↑ ↗ → ↘ ↓ ↙ ← ↘ ⊕ ⊗ ∇ ∂ ∫ ∑ ∏ ∙ ∘ ∙ ∘ ∙ ∘

## ABOUT

Alphabit is a grid-based bitmap typeface that celebrates the blocky and jagged letterforms of early digital typography. Designed with technology as the central theme, it simultaneously references a bygone era of computing and yet feels relevant for modern applications.

## DESIGN

Alphabit was designed by Ben Buysse in 2022.

## INFO

2 Styles  
620 Glyphs  
200+ Languages



## CHARACTER SETS

Basic Latin  
Latin-1 Supplement  
Latin Extended A